

JMG Cranes S.p.A.

Via Sito Nuovo 14
29010 Sarmato (PC) - Italy
t +39 0523 8486
e info@jmgcranes.com



Dati soggetti a variazione senza obbligo di preavviso
Edizione 12/2019 © 2019 JMG Cranes S.p.A. Tutti i diritti riservati



Electric Pick & Carry Cranes



MC 450S (metric)
Max Capacity
45.000 kg

www.jmgcranes.com

JMG[®]
move to solution

MC 450S


FRONT-WHEELS DRIVE WITH COUNTER ROTATION

HYDRAULICALLY TELESCOPING PROPORTIONAL TYPE BOOM

180° REAR STEERING

REMOVABLE COUNTERWEIGHTS

EXTENDIBLE REAR GROUP WITH
REMOVABLE BALLASTS

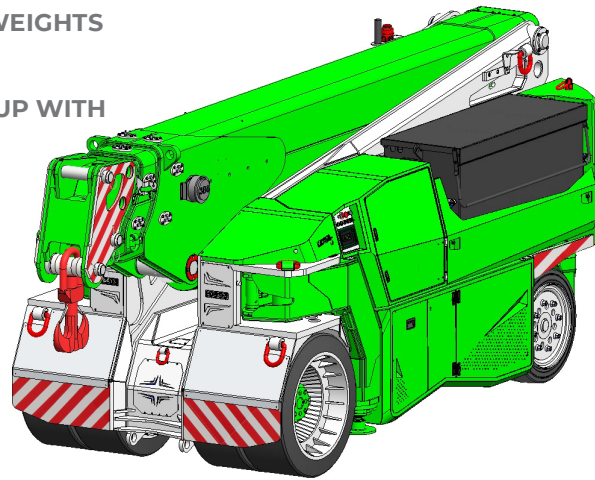

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- BENDABLE MANUAL JIB WITH
MANUAL EXTENSION
- NON-MARKING TIRES
- FOLDABLE OUTRIGGERS
- HYDRAULIC FORKS
- MAN BUCKET
- **Ex** ATEX CONVERSIONS
- CUSTOMIZED PAINTING







Technical features

Max Capacity kg	45.000
Dimensions mm	4900x2200x2415

Front-wheels drive. 2 electric motors AC 16 kW 96V. Insulation class H	LMI Electronic safe load indicator and tilting moment limiter
TotalKg. 35.800 Removable counterweights Kg. 10.600	Automatic braking system on all wheels
96 V - 1550 Ah 8 working hours	Fabricated from preformed and welded quality steel plate
Front nr. 4 superelastic 40x16-30" Rear nr. 4 superelastic 355/50-15"	+63,4°/-4,4°
Rear Steering angle -90°/+90°	Motor driven pump 1x35 kW - 96 V AC, 1x23 kW - 96 AC.

Load charts

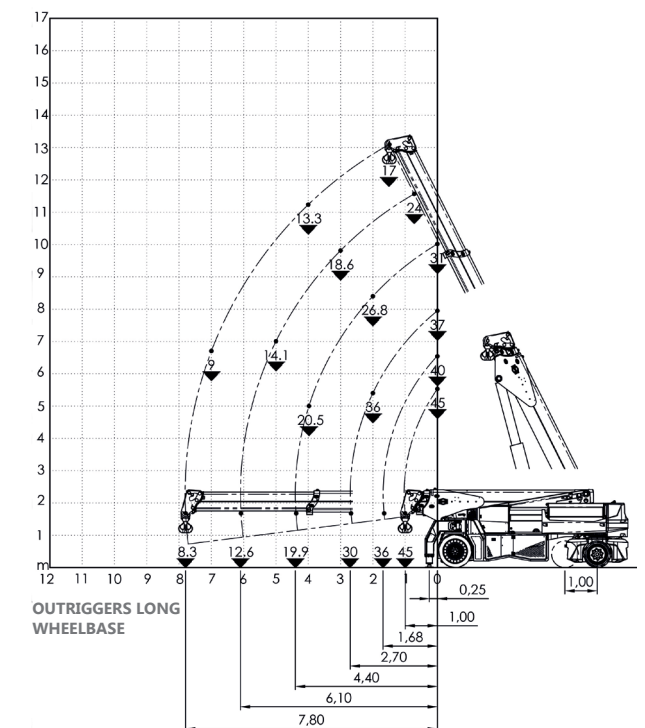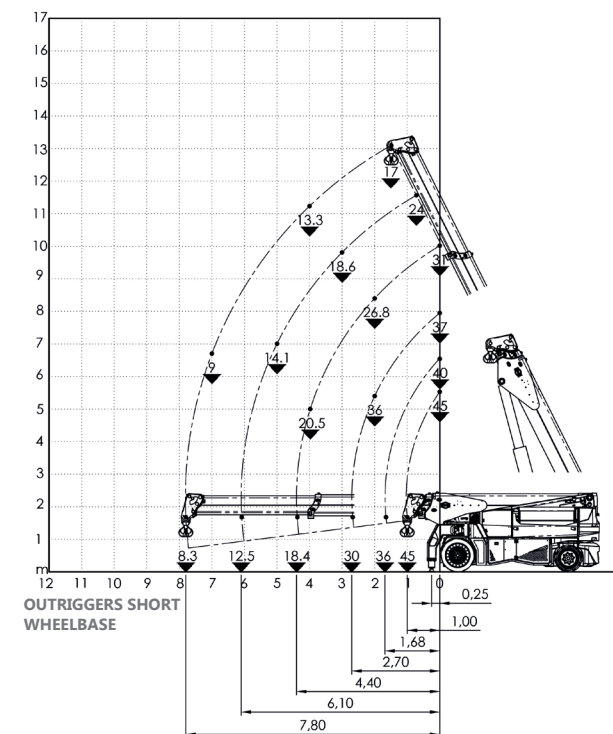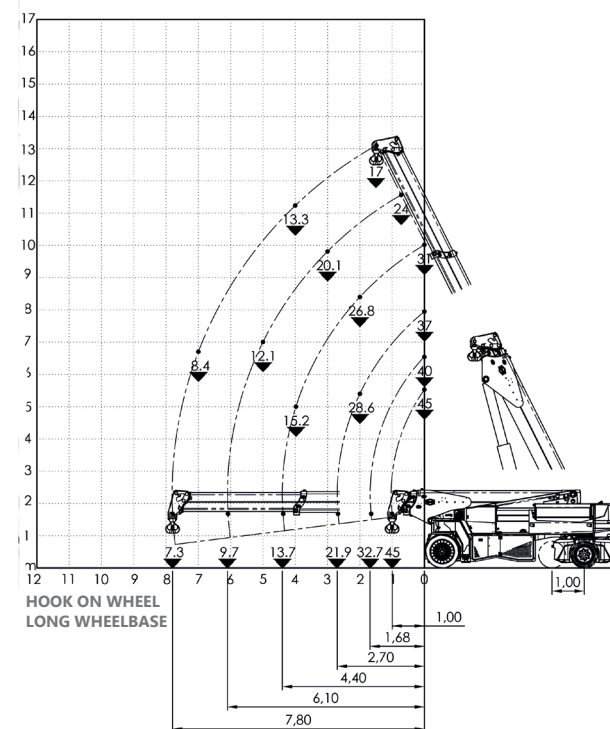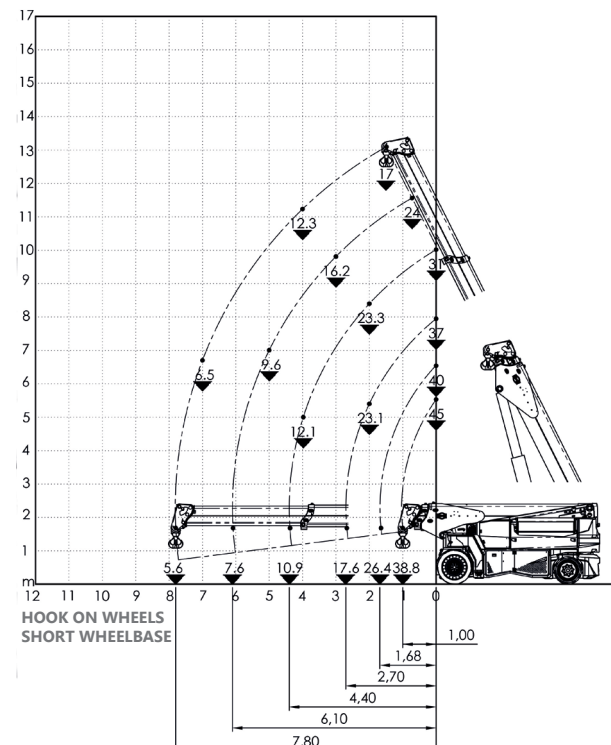

EU Standards CE

	UNI ISO 4030-1: A3
	2006/42 CE MD-2014/30 CE EMC - 2014/35 CE LVD - 2000/14 e and subsequent modifications
	EN 13000:2014 UNI ISO 4301-2:2011 and subsequent modifications



Dimension

